

i20T

WWW.FANVIL.COM

Voice Access Control Quick Installation Guide



Fanvil

Introduction

Package Contents



i20T
Access Control



Connector



Installation diagram



Quick Installation
Guide



CD



Screws lid and tool




RFID Cards



Voice Access Configuration

Step One: Conner to the network

Connect the end of network cable to the device WAN port; another end is connected to the LAN port of the router. Then the hardware connection is completed. Normally, you'd better keep your network for DHCP mode.

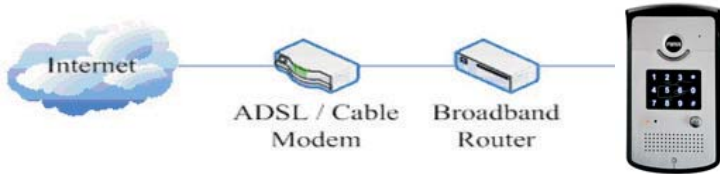

Step Two: Get an IP Address

Methods 1:

1. Use the default IP scanner tool to get it: iDoorPhoneNetworkScanner
 - 1) Install the scanner tool which is saved in CD: iDoorPhoneNetworkScanner;
 - 2) Ensure the working computer (installing IP scanner tool.exe.) is in the same local network with the corresponding device;
 - 3) Run the tool (iDoorPhoneNetworkScanner.exe), to search the IP address of corresponding device within the network.

The screenshot shows the 'iDoorPhone Network Scanner (V 1.0)' application window. It contains a table with the following data:

#	IP Address	Serial Number	MAC Address	SW Version	Description
1	192.168.1.113	I20	00:a8:59:e4:6c:12	2.3.61.34	I20 IF door phone

There is a search icon and a 'Refresh' button on the right side of the window.

Method 2: press and hold “#” key for 3 seconds; the intercom will report the IP address via voice.

Step Three: Log in the WEB interface of the device

Input IP address (e.g. http://192.168.1.149) into address bar of PC's Web browser; the default user name and password are both admin.

The image shows a web interface login form with the following fields and controls:

- User:
- Password:
- Language: English (dropdown menu)
- Logon button

Voice Access Configuration

Step Four: Add SIP account

Set SIP server address, port, user name, password and SIP user with assigned SIP account parameters. Then select “enable registration” to make device start SIP registration.

The screenshot shows the 'SIP Line' configuration page for 'SIP 1'. The left sidebar has 'VoIP' selected. The main content area is divided into sections: 'Basic Settings >>', 'Codec Settings >>', and 'Advanced SIP Settings >>'. The 'Basic Settings' section contains the following fields:

Field	Value	Field	Value
Status	Unapplied	Domain Realm	
Server Address	192.168.2.222	Proxy Server Address	
Server Port	5060	Proxy Server Port	
Authentication User	802	Proxy User	
Authentication Password	****	Proxy Password	
SIP User	802	Backup Server Address	
Display Name	802	Backup Server Port	5060
Enable Registration	<input checked="" type="checkbox"/>	Server Name	

There is an 'Apply' button at the bottom right of the configuration area.

Step Five: Set DSS key

Set the DSS key worked as speed dial function: select type with hot key; set up speed dial number it should be dialed automatically (or numbers you want to make); select SIP line it used; select subtype with speed dial. Submit to take effect.

The screenshot shows the 'Function Key Settings' page. The left sidebar has 'DOOR PHONE' selected. The main content area has a table for configuring function keys:

Key	Type	Number 1	Number 2	Line	Subtype
DSS Key 1	Key Event			[1]1	Ok
DSS Key 2	None			[1]1	Speed Dial
DSS Key 3	None			[1]1	Speed Dial
DSS Key 4	None			[1]1	Speed Dial

There is an 'Apply' button at the bottom center of the configuration area.

Voice Access Configuration

Step Six: Access Control Settings

The screenshot displays the 'DOOR PHONE' configuration page. The left sidebar has 'DOOR PHONE' selected. The main area is divided into 'EGS Settings' and 'Access Table'.

EGS Settings

Switch Mode	monostable	Keypad Mode	Dial and Password
Switch-On Duration	5 (1-600 seconds)	Talk Duration	120 (20-600 seconds)
Remote Password	*	Local Password	****
Description	-20T IP Door Phone	Enable Access Table	Enable
Enable Touchpad	Enable	Enable Card Reader	Enable
Dial Mode Select	Main-Secondary	Time of Switch	16 (5-50 seconds)
Day Start Time	06:00 (00:00-23:59)	Day End Time	18:00 (00:00-23:59)
Address of Log Server	0.0.0.0	Port of Log Server	514
Enable Log Server	Disable	Enable Indoor Open	Disable
Double Authentication Open	Disable	Limit Talk Duration	Enable
Door Unlock Indication	Long beeps	Fixed Code Check Length	4 (1-6)

Access Table

Total: 0 Page: [1] [Prev] [Next] [Delete All] [Right Click here to Save Access Table](#)

Index	Number	Access Code	Access by Call	Access by Psw	Name	Department	Position ID	Time Profile	Access Type
-------	--------	-------------	----------------	---------------	------	------------	-------------	--------------	-------------

Add Access

Number	<input type="text"/>
Access Code	<input type="text"/>
Access by Call	Enable
Access by Password	Enable
Name	<input type="text"/>
Department	<input type="text"/>
Description	<input type="text"/>

> Open door modes:

1. Local

- *Set local password (the default is "6789") via web-door phone-door phone;
- *Use the device's keyboard to input password and # key, and then the door opened.

2. Remote

1) Visitors call to owner

- *Visitors press the speed dial key to call the owner;
- *The owner answer calls, press the "*" key open to visitors.

2) Owner calls to visitors

- *Owner calls to visitors via SIP phone;
- *Voice access automatically answers the call;
- *Owner use keypad to input corresponding authentication codes to open the door.

3. RFID cards

- *Use pre assigned ID cards to touch the access control to open the door.

4. Indoor switch

*Use indoor switch, which is installed and connected with access control. (Please refer to the installation interface schematic CN7)

This screenshot shows a portion of the 'EGS Settings' page. The 'DOOR PHONE' tab is selected. The settings are as follows:

Dial Mode Select	Main-Secondary	Time of Switch	16 (5-50 seconds)
Day Start Time	06:00 (00:00-23:59)	Day End Time	18:00 (00:00-23:59)
Address of Log Server	0.0.0.0	Port of Log Server	514
Enable Log Server	Disable	Enable Indoor Open	Enable
Double Authentication Open	Disable	Limit Talk Duration	Enable
Door Unlock Indication	Long beeps	Fixed Code Check Length	4 (1-6)

Voice Access Configuration

Access control Settings		
Setting Item	Function	Initial Value
Switch mode	Monostable: there is only one action and status-open door mode; Bistable: there are two actions and statuses-open door and close door; each action might be triggered and changed to the other status; after changed, the status would be kept	monostable
Keypad mode	Only password: there is only accepted password input; dialing would be forbidden; Password+dialing: there might be password input, dialing(* key for getting dialing tone, hang up calls; # key for confirming)	Password+dialing
Time of switch	Opened door time for monstable mode. If the time is up, door switch would be closed automatically	5 seconds
Talk Duration	After time is up, the call will be ended automatically	120 seconds
Remote Password	Remote opening door password	*
Local Password	Local opening door password via keypad, the default password length is 4	6789
Tone settings	Mute/Short beeps/Long beeps	Bell ringing
Description	Displayed on IP scanner tool software	i20 IP door phone
Enable Access Table	Enable or disable remote password for opening door during calls	Enable
Enable Touchpad	Enable or disable keypad operation for dialing and password input	Enable
Enable Card Reader	Enable or disable RFID card checked	Enable
Dial Mode Select	<Primary /Secondary>mode allow system to call primary extension first, if it were no answer, cancel the call and then call secondary extension automatically; <Day/Night>mode allow system to check the calling time is belong to Day or Night time, and then decide to call the number 1 or number 2 automatically; User just press speed dial key once;	Primary /secondary
Time of Switch	The period between one-button Call function to call the first and second number	16S
Day Start Time	When select <Day/Night>mode, the time to start Day time	06:00
Day End Time	When select <Day/Night>mode, the time to end up Day time	18:00
Address of Log Server	Log server address(IP)	0.0.0.0
Port of Log Server	Log server port(0-65535)	514
Enable Log Server	Enable or disable to connect with log server	Disable
Enable Indoor Open	Enable or disable to open door with indoor switch	Disable
Double Authentication Open	If it enabled, the door would be opened only when the local password and cards checked are both correct	Disable
Door Unlock Indication	Indication tone for door opened. There are 3 type of tone: silent/short beeps/long beeps	Long beeps
Fixed Code Check Length	The local password length would be restricted with it; if the input password length is matched with it, system would check it immediately	4

Voice Access Configuration

Remote access table		
index	Assigned extension's index number	
Number	Remote extension's number	
Access Code	Access code for visitor. When remote phone calls and the number is in access list, the user can input access code to open the door.	
Access by Call	Enable or disable the extension to have access to open the door via calls	Enable
Access by Password	Enable or disable the access code might have access to be as unique local password to open door	Enable
Name	Card holder's name	
Department	Card holder's department	
Position	Card holder's position	
ID	RFID card's ID number	
Time Profile	The access user's valid time section to open door; if it were none, there would be taken effect all day	None
Access Type	Host: the extension number is host type; the call from it would be auto answered Guest: the extension number is guest type; the call from it would be ringed to wait answered if the auto answer were also disabled	Guest

>Cards management

1.Administrator cards for adding/deleting cards

1) Add issuer admin cards

Input a card's ID, selected <Issuer> in the types and Clicked <Add>, you can add Issuer admin card.

Add Administrator

ID	<input type="text" value="0003476384"/>	<input type="button" value="Add"/>
Type	<input type="text" value="Issuer"/>	

2) Add Revocation admin cards

Input a card's ID, selected <Revocation> in the types and Clicked <Add>, you can add Revocation admin card.

Add Administrator

ID	<input type="text" value="0003408919"/>	<input type="button" value="Add"/>
Type	<input type="text" value="Revocation"/>	

3) Administrator Table

Administrator Table		
ID	Date	Type
0003476384	MAY 06 11:16:42	Issuer
0003408919	MAY 06 11:17:33	Revocation

Voice Access Configuration

2. Add user cards

Method 1: used to batch add cards for starters

- 1) In web page <Card Reader Setting> option, select <Card Issuing> function;

Card Reader Setting

State

- 2) Click <Apply>, Card Reader would be entered the issuing status;



- 3) Use card to touch card reader induction area, and then hear the card reader confirmed indication tone. You might repeat it to add cards;
- 4) In web page < card reader Settings > option, select <normal> function;

Card Reader Setting

State

- 5) Click <Apply>, Card Reader would be back to the Normal status;
- 6) The issuing records can be found on the door card list.

Door Card Table

Total: 3 Page: [Right Click here to Save Door Card Table](#)

Index	ID	Issuing Date	Card State
1	0004770424	MAY 06 11:19:00	<input type="button" value="Enable"/>
2	0003477117	MAY 06 11:19:21	<input type="button" value="Enable"/>
3	0003408920	MAY 06 11:19:34	<input type="button" value="Enable"/>

Method 2: used to batch add cards for intermediates

- 1) Use <Issuer admin card> to touch card reader induction area, and it would be entered issuing card status;
- 2) Use new cards to touch card reader induction area, and hear the card reader confirmed indication tone. You might repeat it to add cards;
- 3) Use <Issuer admin card> to touch card reader induction area, and it would be back to card read only status

Methods 3: use to add few cards

- 1) Input cards number in door card settings page, and then press add button.

Add Door Card

ID


Note: you can also use the USB card reader connected with PC to get cards ID automatically.

Voice Access Configuration

3.Delete user cards


Method 1: used to batch delete cards for starters

1) In web page <Card Reader Setting> option, select <Card revoking>function;

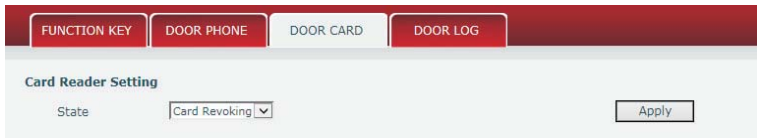


The screenshot shows a web interface with a dark red header containing four buttons: 'FUNCTION KEY', 'DOOR PHONE', 'DOOR CARD', and 'DOOR LOG'. Below the header is a light gray box titled 'Card Reader Setting'. Inside this box, there is a 'State' label followed by a dropdown menu currently set to 'Card Revoking'. To the right of the dropdown is an 'Apply' button.

2) Click <Apply>, Card Reader would be entered the revoking status;



1) Use card to touch card reader induction area, and then hear the card reader confirmed indication tone. You might repeat it to delete cards;

2) In web page < card reader Settings > option, select <normal> function;

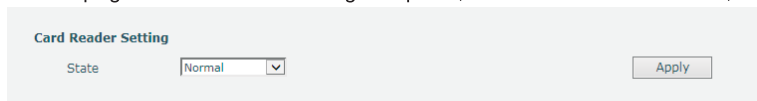

The screenshot shows the same 'Card Reader Setting' web page as above, but the dropdown menu is now set to 'Normal'. The 'Apply' button remains to the right.

5) Click <Apply>, Card Reader would be back to the Normal status;

Method 2: used to batch add cards for intermediates


1) Use < Revocation admin card> to touch card reader induction area, and it would be entered revoking card status;

2) Use the cards you want to delete from system, to touch card reader induction area, and hear the card reader confirmed indication tone. You might repeat it to delete cards;

3) Use <Revocation admin card> to touch card reader induction area, and it would be back to card read only status.

Methods 3: use to delete few cards

1) In web page<Delete Door card>, select the card ID and then press delete button.



The screenshot shows a light gray box titled 'Delete Door Card'. It contains a dropdown menu with the card ID '1231233465' selected and a 'Delete' button to its right.

Voice Access Configuration

4. Add Remote access settings

1) Add Access

Fill with the user's data, and then assign the user's card ID, which is configured in door card table; Click <Add>.

Add Access

Number	<input type="text" value="7289"/>
Access Code	<input type="text" value="8888"/>
Access by Call	<input type="button" value="Enable"/>
Access by Password	<input type="button" value="Enable"/>
Name	<input type="text" value="Xiaoming Chen"/>
Department	<input type="text" value="market"/>
Position	<input type="text" value="employee"/>
ID	<input type="text" value="0004770424"/>
Time Profile	<input type="button" value="None"/>
Access Type	<input type="button" value="Host"/>

2) Access Table

Access Table

Total: 1 Page: [Right Click here to Save Access Table](#)

Index	Number	Access Code	Access by Call	Access by Psw	Name	Department	Position	ID	Time Profile	Access Type
1	7289	8888	Enable	Enable	Xiaoming Chen	employee	market	0004770424	None	Host

3) Time Profile Settings

Profile Settings

Profile

Profile Name

Day	Active	From(00:00-23:59)	To(00:00-23:59)
Sunday	<input type="button" value="No"/>	<input type="text" value="00:00"/>	<input type="text" value="00:00"/>
Monday	<input type="button" value="Yes"/>	<input type="text" value="00:00"/>	<input type="text" value="20:00"/>
Tuesday	<input type="button" value="Yes"/>	<input type="text" value="00:00"/>	<input type="text" value="20:00"/>
Wednesday	<input type="button" value="Yes"/>	<input type="text" value="00:00"/>	<input type="text" value="20:00"/>
Thursday	<input type="button" value="Yes"/>	<input type="text" value="00:00"/>	<input type="text" value="20:00"/>
Friday	<input type="button" value="Yes"/>	<input type="text" value="00:00"/>	<input type="text" value="20:00"/>
Saturday	<input type="button" value="No"/>	<input type="text" value="00:00"/>	<input type="text" value="00:00"/>

Time Profile Settings	
Time profile sections	There are 4 sections for time profile configuration
Profile name	The name of profile to help remember the time definition
Active	If it were yes, the time profile would be taken effect. Other time section not included in the profiles would not allow users to open door
from	The start time of section
To	The end time of section

Fanvil